

# Precision Sliding Short Circuit, WR284

GERLING

**Model GA1205B**  
**Model GA1215A**


GAE's family of Precision Sliding Short Circuits are designed for use in high power microwave networks to establish a standing wave in waveguide and adjust its relative phase angle continuously throughout a range more than 1/2-guide wavelength. Typical uses include waveguide applicators in which a standing wave must be accurately positioned to maximize the coupling of microwave power to the load being heating.

The sliding plunger utilizes a "non-contacting" reactive choke design which allows adjustment under high power operation without high losses or arcing. High temperature, low loss polyimide "buttons" provide low friction surfaces for reduced wear. Positional accuracy is provided by a precision screw drive mechanism. Precise positioning is enabled by a multi-turn dial with a digital readout calibrated in tenths of a turns unit.

Model GA1205B features the popular WR284 Q-D (quick-disconnect) round flange that uses a single screw clamp for waveguide connections.

### General Specifications:

Frequency	2450 MHz nominal
Power (continuous)	3 kW
Waveguide	WR284 (RG75/U)
Input Flange	GA1205B: Q-D Round (UG584/U) GA1215A: CPR (UG1725/U)
Plunger Travel	5.0 inches (12.7 cm)
Position Indicator	Multi-turn dial, locking, with digital readout
Readout Calibration	0.005 inches (0.013 cm) movement per unit on the digital readout
Backlash	0.010 inches (0.025 cm) max.
Return Loss	0.05 dB max @ 2450 MHz

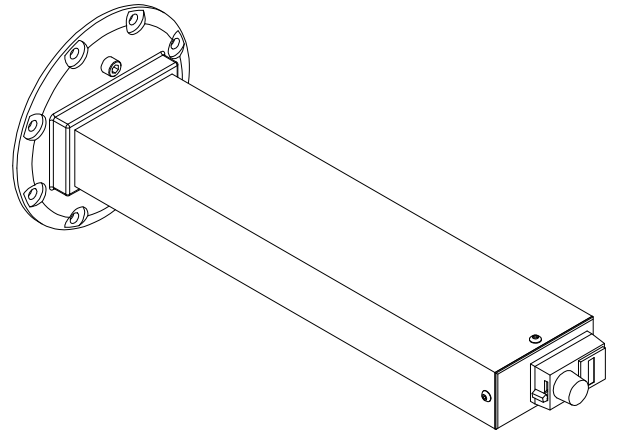


**Model GA1205B**

Construction	Waveguide: Aluminum Actuator Screw: Stainless steel Plunger: Brass and aluminum
--------------	---

### Options:

- ◆ Flange interlock switches

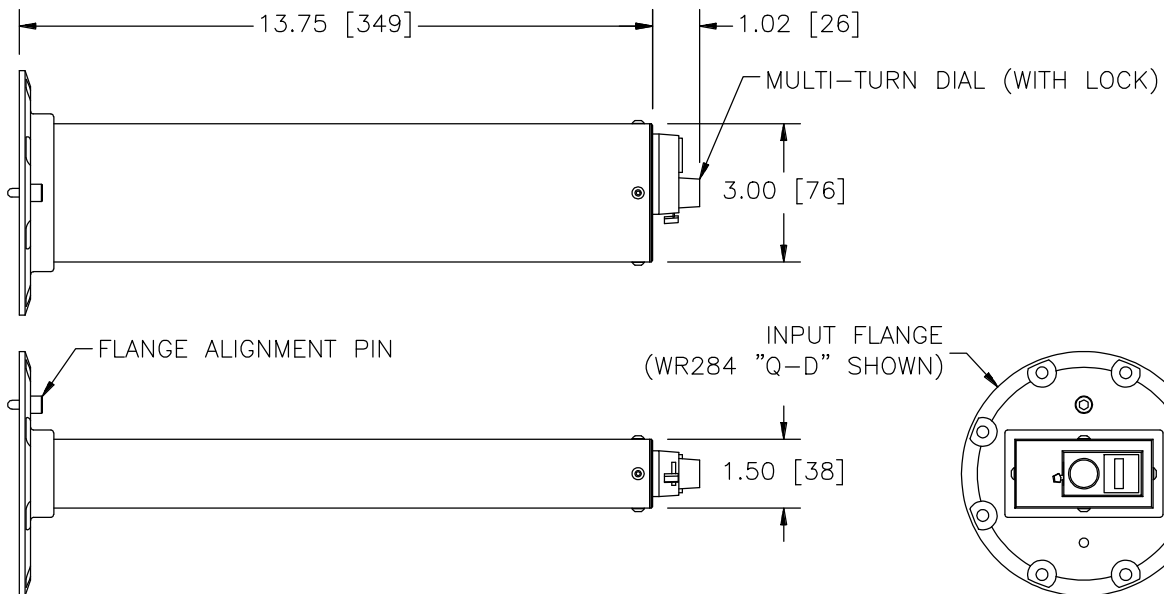

**GERLING APPLIED  
ENGINEERING, INC.**

© 2007-2008 Gerling Applied Engineering, Inc.  
PO Box 580816 ▪ Modesto, CA 95358 ▪ USA  
Phone: +1-209-527-8960 ▪ Fax: +1-209-527-5385  
E-mail: sales@2450MHz.com ▪ Web: www.2450MHz.com