

700W Laboratory Microwave Generator, 5.8 GHz, CPR159



GERLING

Model GA4307A

The model GA4307A Microwave Generator is a completely integrated system designed for high performance yet economical delivery of 5.8 GHz microwave power. Consisting of separate magnetron head and switch mode power supply modules, this user-friendly system is ideal for bench-top laboratory use with minimal requirements for installation and operation. All control functionality is located conveniently near the work area as well as available remotely for automated processing.

Installation, serviceability and operator safety were primary considerations in the design of the GA4307A system. Setup involves little more than locating the bench-mounted modules, attaching the waveguide and interconnect cables and plugging in the line power connector. Convenient mounting holes allow the equipment to be secured in place if necessary. Removal and replacement of the internal magnetron can be accomplished in less than ten minutes using standard tools. The system is designed to comply with all regulatory requirements for emissions and operator safety when used in the laboratory.

Both system modules are housed in attractive brushed stainless steel enclosures for a striking appearance and rugged durability. The complete system includes a standardized 10 ft. cable set for connecting between the magnetron head and power supply (alternate lengths may be specified by customer). Optionally, the interconnect cables and/or connector set may be ordered separately. Contact GAE for more detailed information on these and other available options and custom configurations.

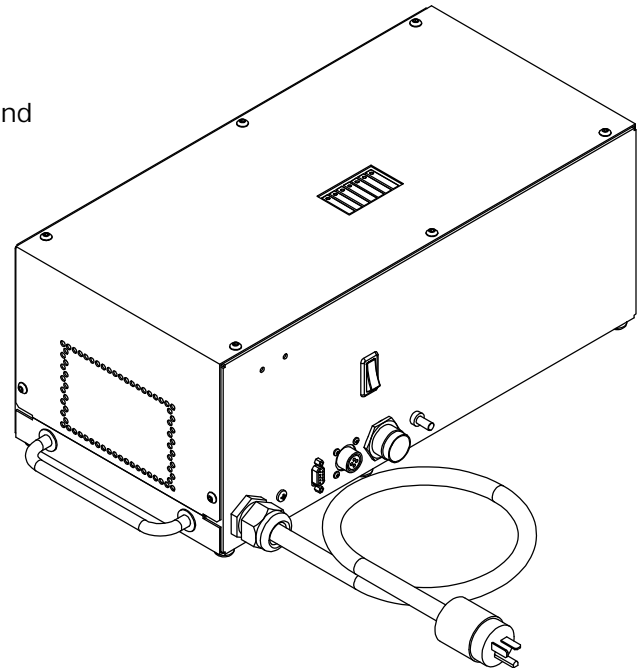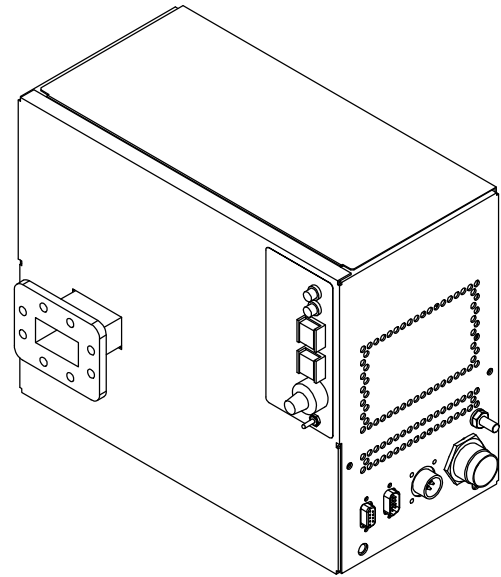

General Specifications:

| | |
|----------------------|--|
| Output Power (max) | 700W (variable) |
| Magnetron | Panasonic M5801 |
| Output Waveguide | WR159 |
| Output Flange | CPR159F (UG-1731/U) |
| Frequency | 5.8 GHz +/- 30 MHz |
| Cooling | Forced air by internal fan |
| Input Line Power | 98-132 VAC, 60 Hz, 1-phase, 20 A max. (17 A @115 VAC) |
| Line Power Connector | NEMA 5-20P style plug with 10 ft. power cord |
| Controls | Main Power On-Off (circuit breaker) Mw Start (pushbutton switch) Mw Stop (pushbutton switch) Mw Power Adjust (10-turn dial) System Ready (Green indicator) HV On (Red indicator) Power Adjust Selector (toggle switch) |
| Interlocks | Access cover, Magnetron cooling, Magnetron over-temp |
| Construction | Brushed stainless steel enclosures, aluminum waveguide |
| Weight (approx.) | Magnetron Head: 24 lbs (11 kgm) Power Supply: 40 lbs (18 kgm) |

Mating Connectors (supplied with cable set):

| | |
|----------------------|-----------------------------|
| High Voltage | AMP 4-conductor LGH series |
| Fan & Filament Power | AMP 4-conductor CPC series |
| Control I/O | 9-pin subminiature "D" |
| Remote Control | 9-pin Male subminiature "D" |

Options:

- ◆ Alternate waveguide flange styles with threaded inserts, stud or captive fasteners
- ◆ Custom cable sets

GERLING


GERLING APPLIED
ENGINEERING, INC.

© 2004 Gerling Applied Engineering, Inc.
PO Box 580816 • Modesto, CA 95358 • USA
Phone: +1-209-527-8960 • Fax: +1-209-527-5385
E-mail: sales@5800MHZ.com • Web: www.5800MHZ.com



700W Laboratory Microwave Generator, 5.8 GHz, CPR159






Model GA4307A

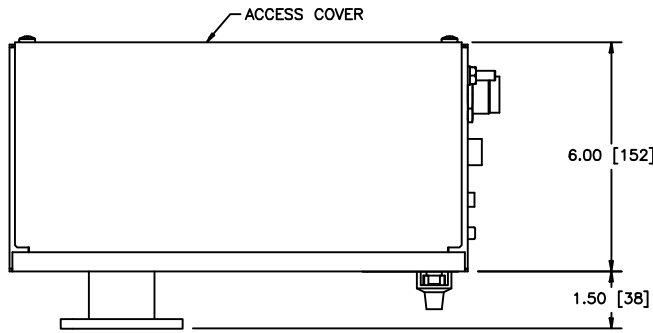

MAGNETRON HEAD

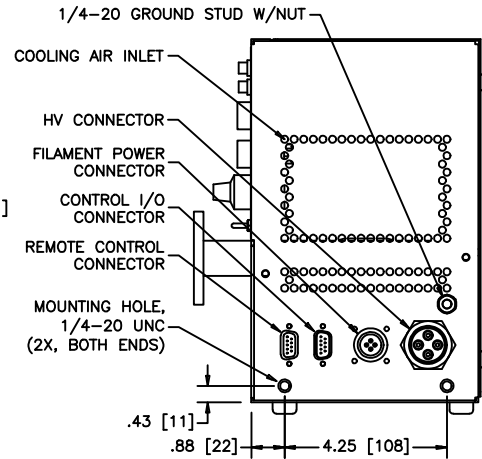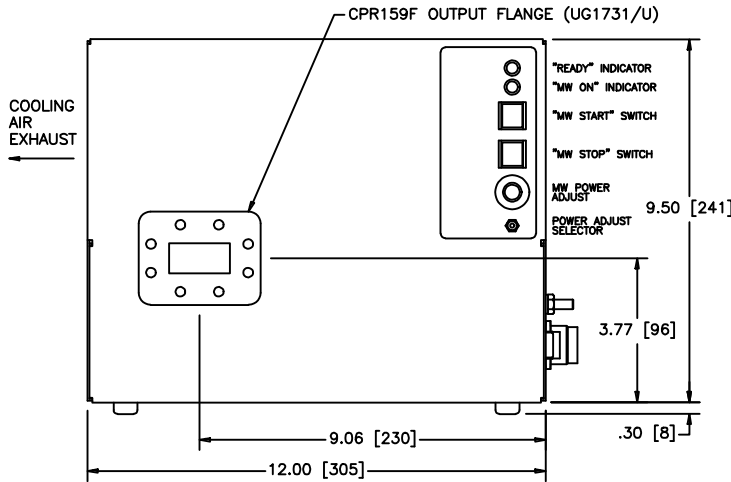

POWER SUPPLY

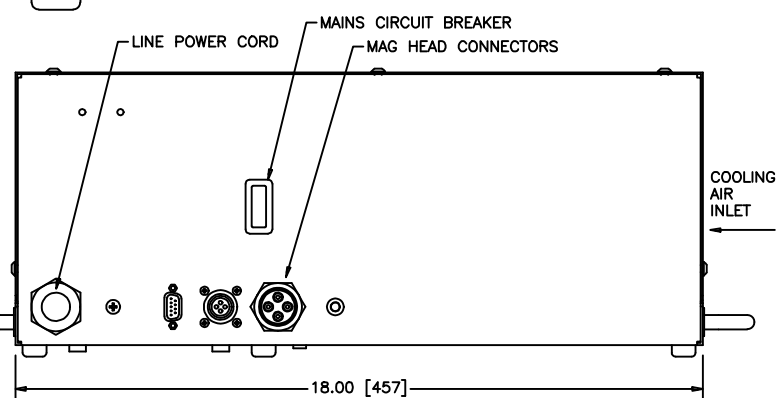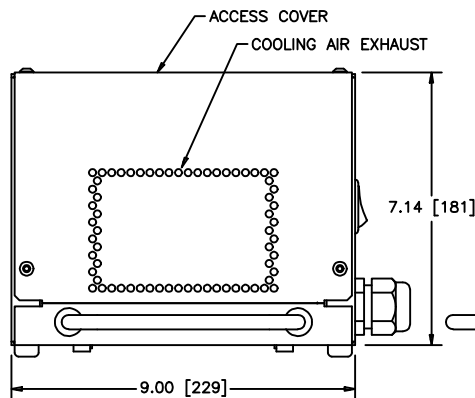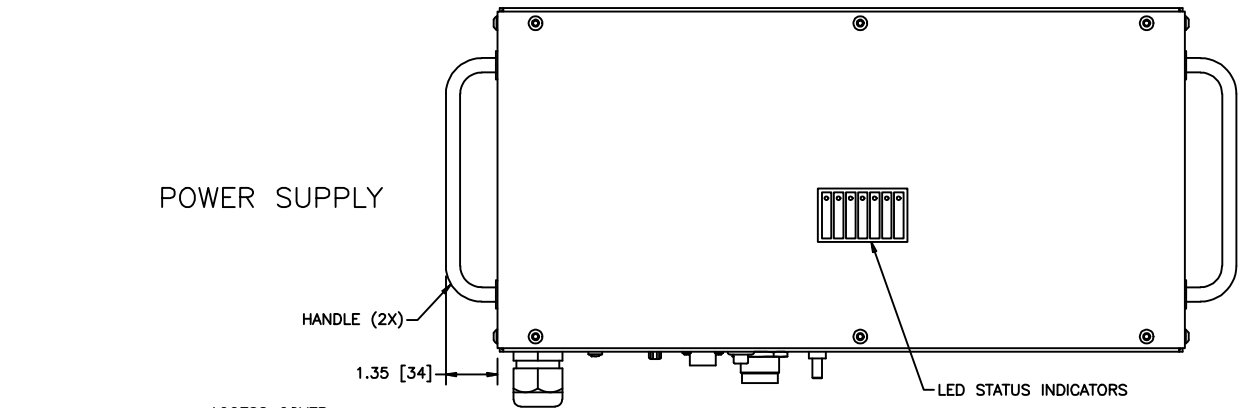

GERLING APPLIED ENGINEERING, INC.

© 2004 Gerling Applied Engineering, Inc.
 PO Box 580816 • Modesto, CA 95358 • USA
 Phone: +1-209-527-8960 • Fax: +1-209-527-5385
 E-mail: sales@5800MHz.com • Web: www.5800MHz.com

All dimensions are in inches [millimeters].